

MMCX Female Connector Solder Surface Mount PCB / SMD Type
RF Connector Technical Data Sheet
MX-008-3

Configuration

- MMCX Female Connectr
- Solder / Reflow
- SMD-Type (Surface Mount Device)
- 50 Ohms

Features

- Max VSWR of 1.25 : 1 up to 6 GHz
- MMCX Interface compliant with IEC-61169-52

Applications

- General Purpose Test

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.25 : 1	
Operating Voltagr(AC)			250	Vrms

Mechanical Specifications

Size

Length	[mm]	5.0
Width	[mm]	3.4
Height	[mm]	3.4
Weight	[g]	0.2



MMCX Female Connector Solder Surface Mount PCB / SMD Type

RF Connector Technical Data Sheet

MX-008-3

Weight

Description	Connector 1
Type	MMCX Female
Polarity	Standard
Interface Specification	IEC 61169-52

Material Specifications

Connector		
Description	Material	Plating
Type	MMCX Female	-
Contact	Beryllium Copper	Gold
Insulation	PTFE	-
Body	Brass	Gold

Environmental Specifications

Temperature

Operating Range -50 to +150 deg C


Compliance Certifications

- RoHS Compliant Yes

Plotted and Other Data

Notes :

MMCX Female Connector Solder Surface Mount PCB / SMD Type
RF Connector Technical Data Sheet
MX-008-3

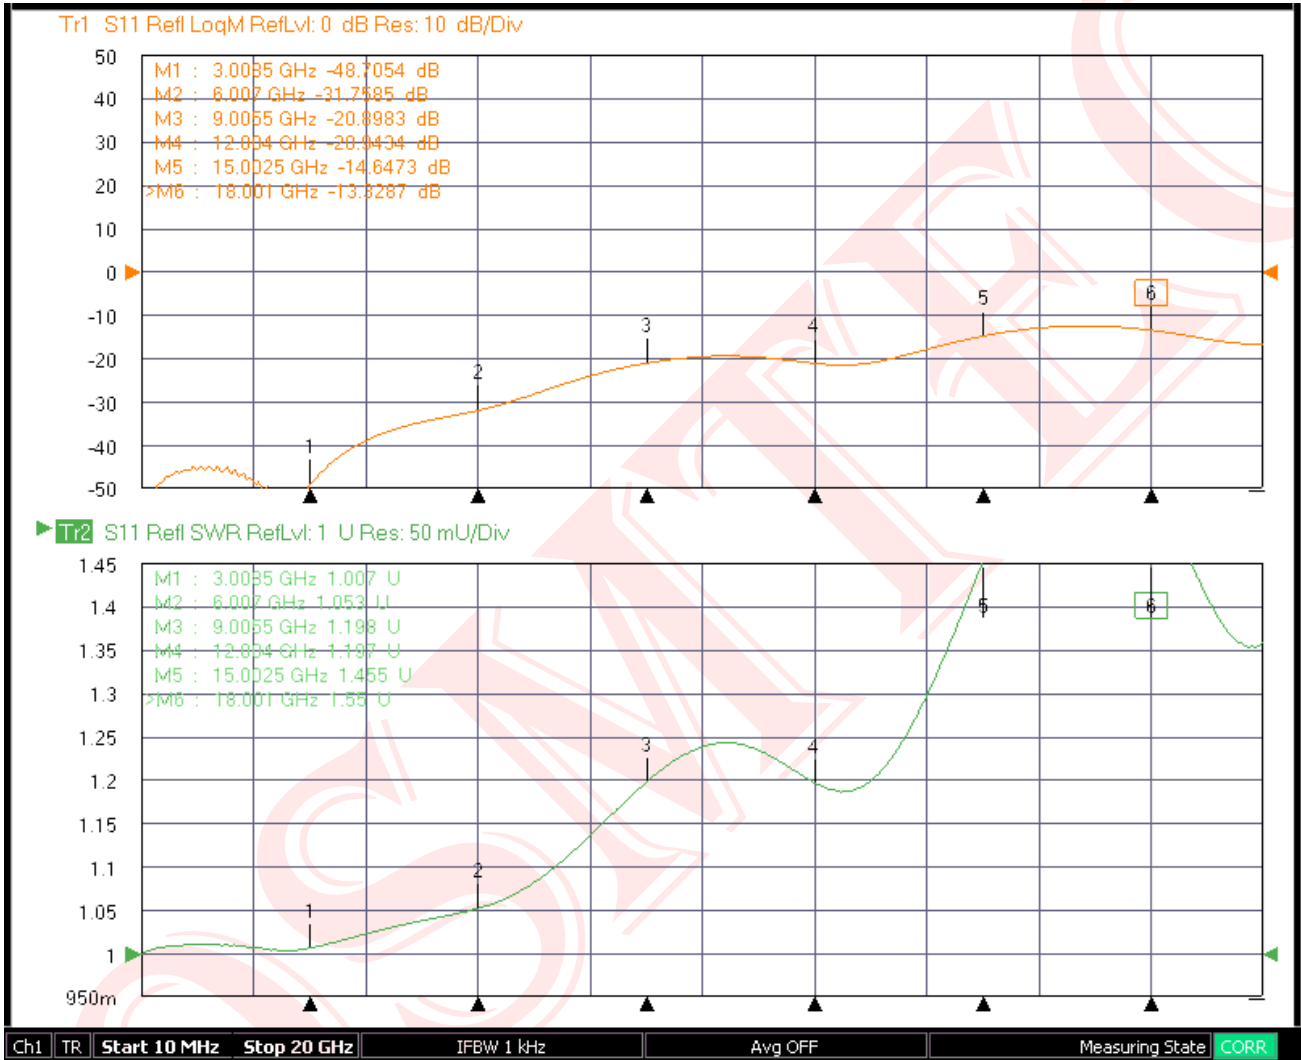

MMCX Female Connector Solder Surface Mount PCB / SMD Type

RF Connector Technical Data Sheet MX-008-3

