

## N Female to N Male Adapter

### RF Adapters Technical Data Sheet N-022-1

#### Configuration

- N Female Connectr 1
- N Male Connectr 2
- 50 Ohms

#### Features

- Max VSWR of 1.2 : 1 up to 18 GHz
- N Interface compliant with IEC 60169-16

#### Applications

- General Purpose Test

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
VSWR			1.2 : 1	
Operating Voltagr(AC)			1,000	Vrms
Inner Conductor DC Resistance			2	mOhms
Outer Conductor DC Resistance			0.5	mOhms
Insertion Resistance	5,000			mOhms

#### Mechanical Specifications

##### Size

Length	[mm]	37.25
Width	[mm]	22.0
Weight	[g]	53.0

## N Female to N Male Adapter

### RF Adapters Technical Data Sheet N-022-1

Description	Connector 1	Connector2
Type	N Male	N Male
Polarity	Standard	Standard
Interface Specification	IEC 60169-16	IEC 60169-16
Mating Cycles	500	500
Hex Size	-	-
Mating Torque	-	-
Coupling Proof Torque, Min	-	-

#### Material Specifications

Description	Connector 1		Connector2	
	Material	Plating	Material	Plating
Type	N Male	-	N Male	-
Contact	Beryllium Copper	Gold	Beryllium Copper	Gold
Insulation	PTFE	-	PTFE	-
Body	Brass	CuSnZn	Brass	CuSnZn
Coupling Nut	Brass	CuSnZn	Brass	CuSnZn
Gasket	Silicone	-	Silicone	-
-	-	-	-	-

#### Environmental Specifications

##### Temperature

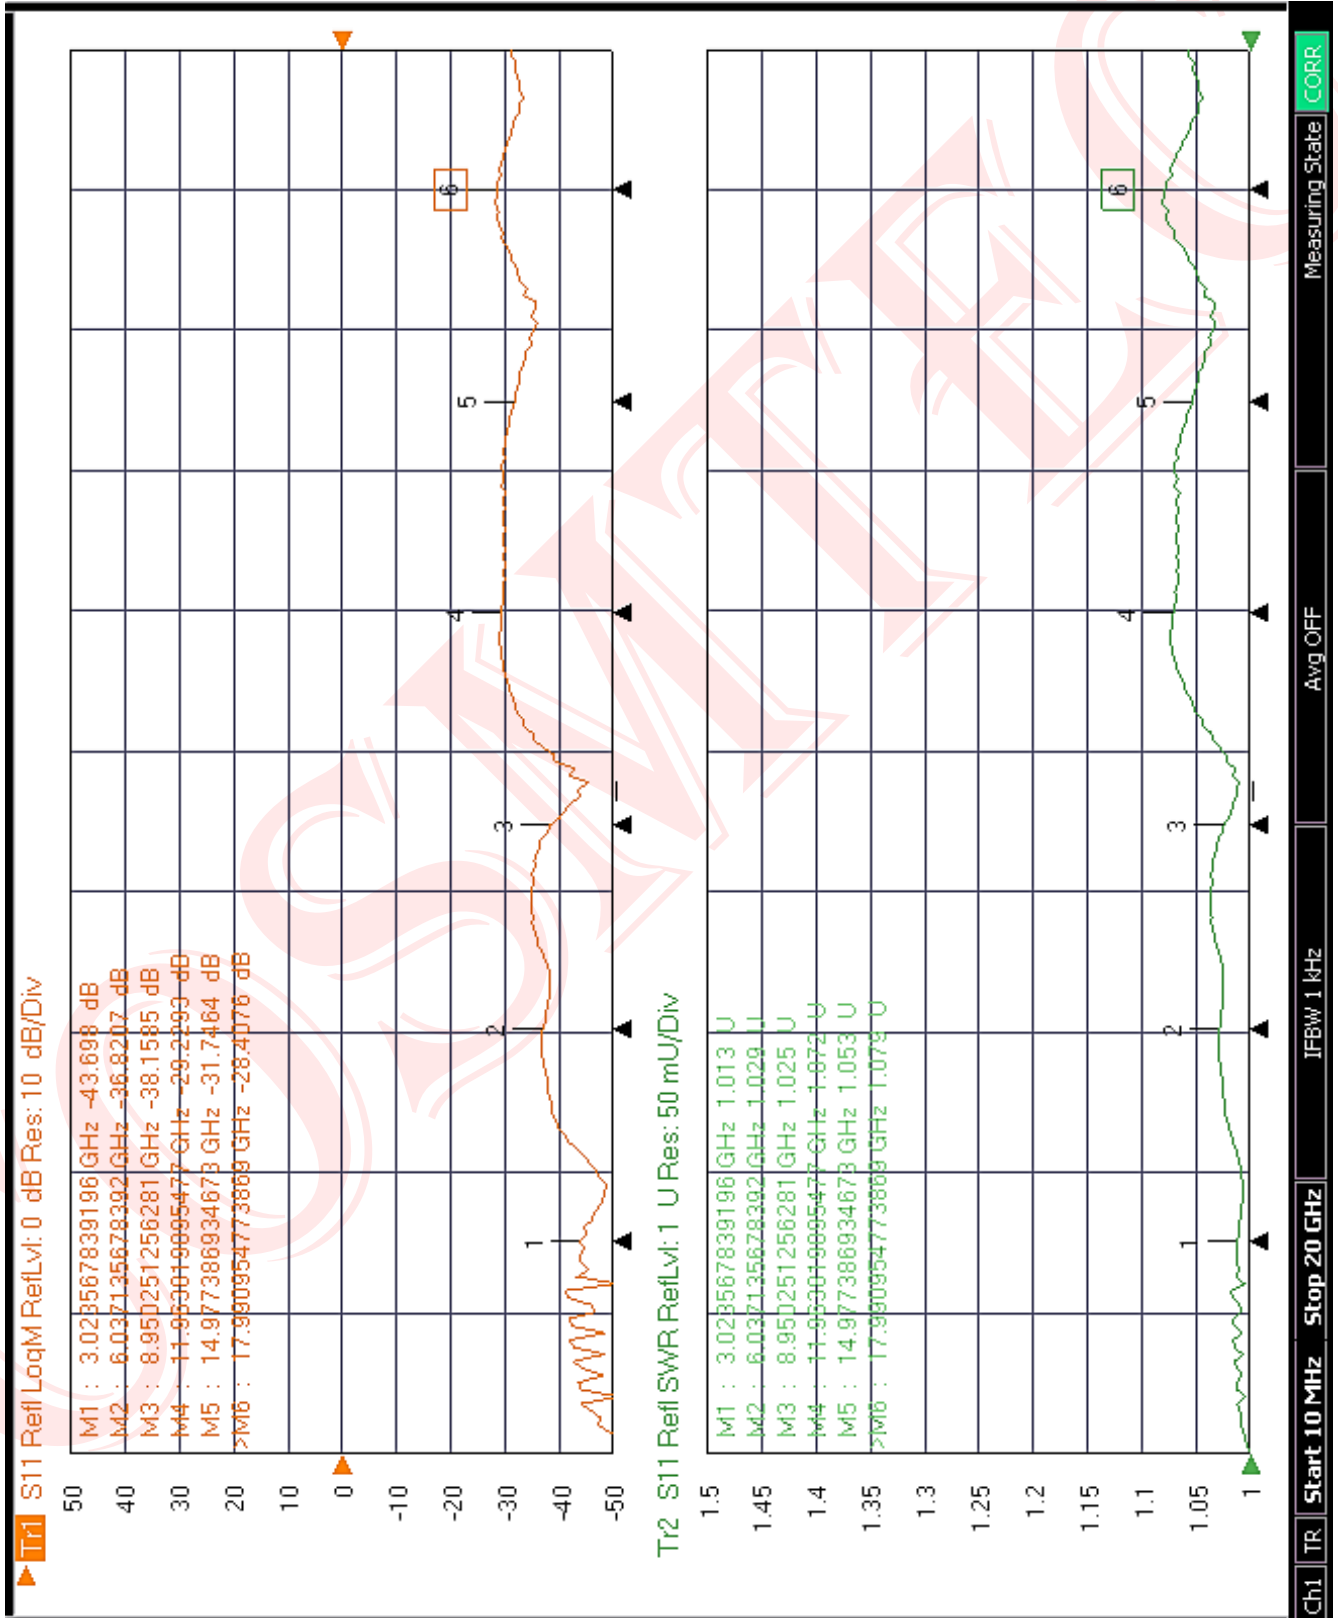
Operating Range -60 to +165 deg C

#### Compliance Certifications

- RoHS Compliant Yes

#### Plotted and Other Data

Notes :

**N Female to N Male Adapter**
**RF Adapters Technical Data Sheet  
N-022-1**


### N Female to N Male Adapter

## RF Adapters Technical Data Sheet N-022-1

