

SMA Female to SMA Female Adapter
RF Adapters Technical Data Sheet
S-006-27HP-TGG (27GHz)

Configuration

- SMA Female Connectr 1
- SMA Female Connectr 2
- 50 Ohms

Features

- Max VSWR of 1.25 : 1 up to 27 GHz
- SMA Interface compliant with MIL-STD-348A

Applications

- General Purpose Test

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		27	GHz
VSWR		1.15 : 1	1.25 : 1	
Operating Voltagr(AC)			500	Vrms
Inner Conductor DC Resistance			3	mOhms
Outer Conductor DC Resistance			2	mOhms
Insertion Resistance	5,000			mOhms

Mechanical Specifications
Size

Length	[mm]	19.5
Width	[mm]	9.2
Height	[mm]	8.0
Weight	[g]	3.8



SMA Female to SMA Female Adapter
RF Adapters Technical Data Sheet
S-006-27HP-TGG (27GHz)

Weight

Description	Connector 1	Connector2
Type	SMA Female	SMA Female
Polarity	Standard	Standard
Interface Specification	MIL-STD-348A	MIL-STD-348A
	MIL-C-39012	MIL-C-39012
Mating Cycles	500	500
Hex Size	8 mm	8 mm
Mating Torque		-
Coupling Proof Torque, Min		-

Material Specifications

Description	Connector 1		Connector2	
	Material	Plating	Material	Plating
Type	SMA Female	-	SMA Female	-
Contact	Beryllium Copper	Gold	Beryllium Copper	Gold
Insulation	PTFE	-	PTFE	-
Outer Conductor	-	-	-	-
Body	Brass	Gold	-	-
Gasket	-	-	-	-
Coupling Nut	-	-	-	-

Environmental Specifications

Temperature

Operating Range -50 to +125 deg C


Compliance Certifications

- RoHS Compliant Yes

Plotted and Other Data

Notes :

SMA Female to SMA Female Adapter
RF Adapters Technical Data Sheet
S-006-27HP-TGG (27GHz)

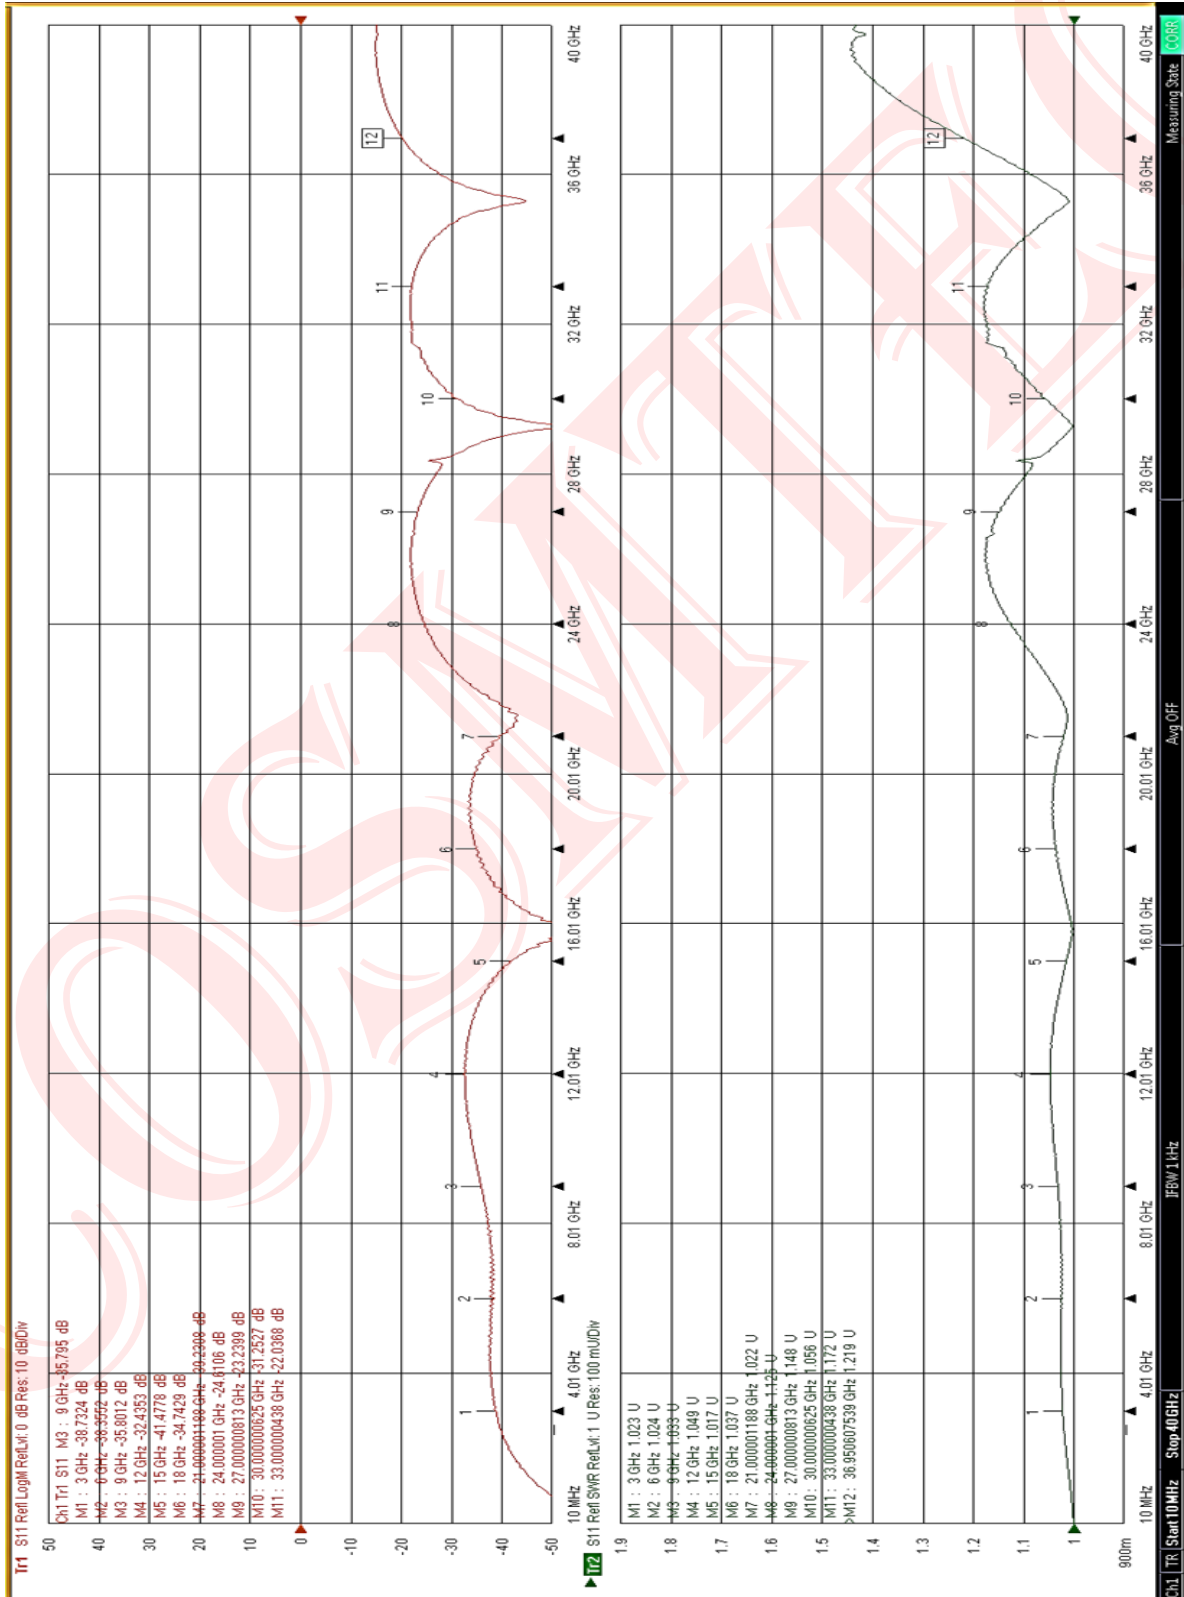

SMA Female to SMA Female Adapter
RF Adapters Technical Data Sheet
S-006-27HP-TGG (27GHz)

