

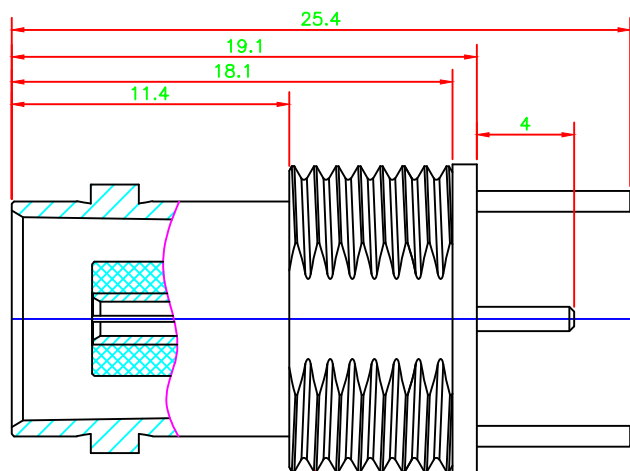
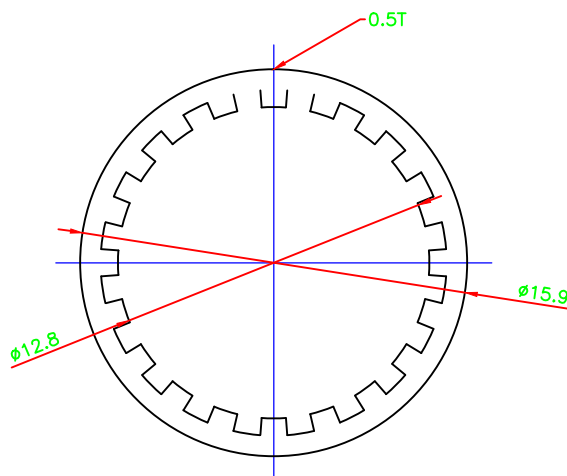
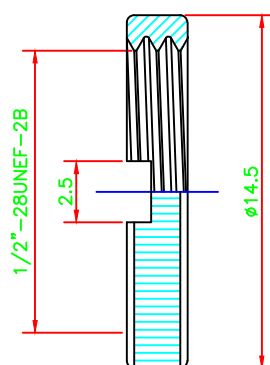


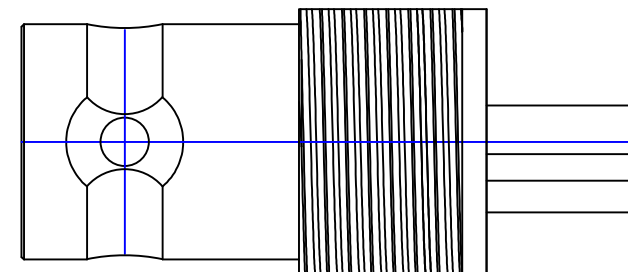

1/2"-28UNEF-2A

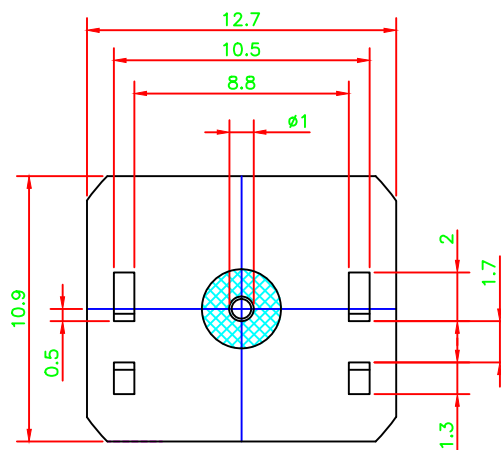


NO	Description	Material	Finish
1	Body	Brass	Nickel
2	Contact	Brass	Gold
3	Insulator	Teflon	-
4	Joint Cover	Brass	Nickel
5	Nut	Brass	Nickel
6	Washer	Brass	Nickel

Dimensions Are in Millimeters
Unless Otherwise Specified
Tolerances



0.5-6 = ± 0.2
6-30 = ± 0.4
30-120 = ± 0.6
120-315 = ± 1.0
315-1000 = ± 1.6
1000-2000 = ± 2.4



COSMTEC RESOURCES CO., LTD

DRAFT	CHECKED	APPROVED
The Drawing Contains Information That Is Proprietary To Cosmtec Resources Co., Ltd And Should Not Be Used Without Written Permission. www.cosmtec.com		

NO	Items	Specs
1	Impedance	50Ω
2	Frequency	DC~6GHz
3	V.S.W.R	1.3 Max
4	Working Voltage	500V
5	Dielectric Withstanding Voltage	AC 1500V
6	Insulation Resistance	5000 MΩ Min
7	Contact Resistance	Center contact ≤ 1.5mΩ Outer contact ≤ 1.0mΩ
8	Temperture Range	-55°C ~ +165°C
9	Mating	Screw-On
10	Material/Finish	All RoHS Compliant

Part No.	B-055-GF
Title:	BNC JACK 50Ω SOLDER EDGE MOUNT FOR PCB
DATE:	FEB/10/2022
SCALE:	1:1
UNIT	m/m
REV	A