




NO	Description	Material	Finish
1	Body	Brass	Nickel
2	Insulator	Teflon	—
3	Contact	Brass	Gold
4	Bullet Pin	Brass	Gold
5	Nut	Brass	Nickel
6	Washer	Brass	Nickel

Dimensions Are in Millimeters
Unless Otherwise Specified
Tolerances

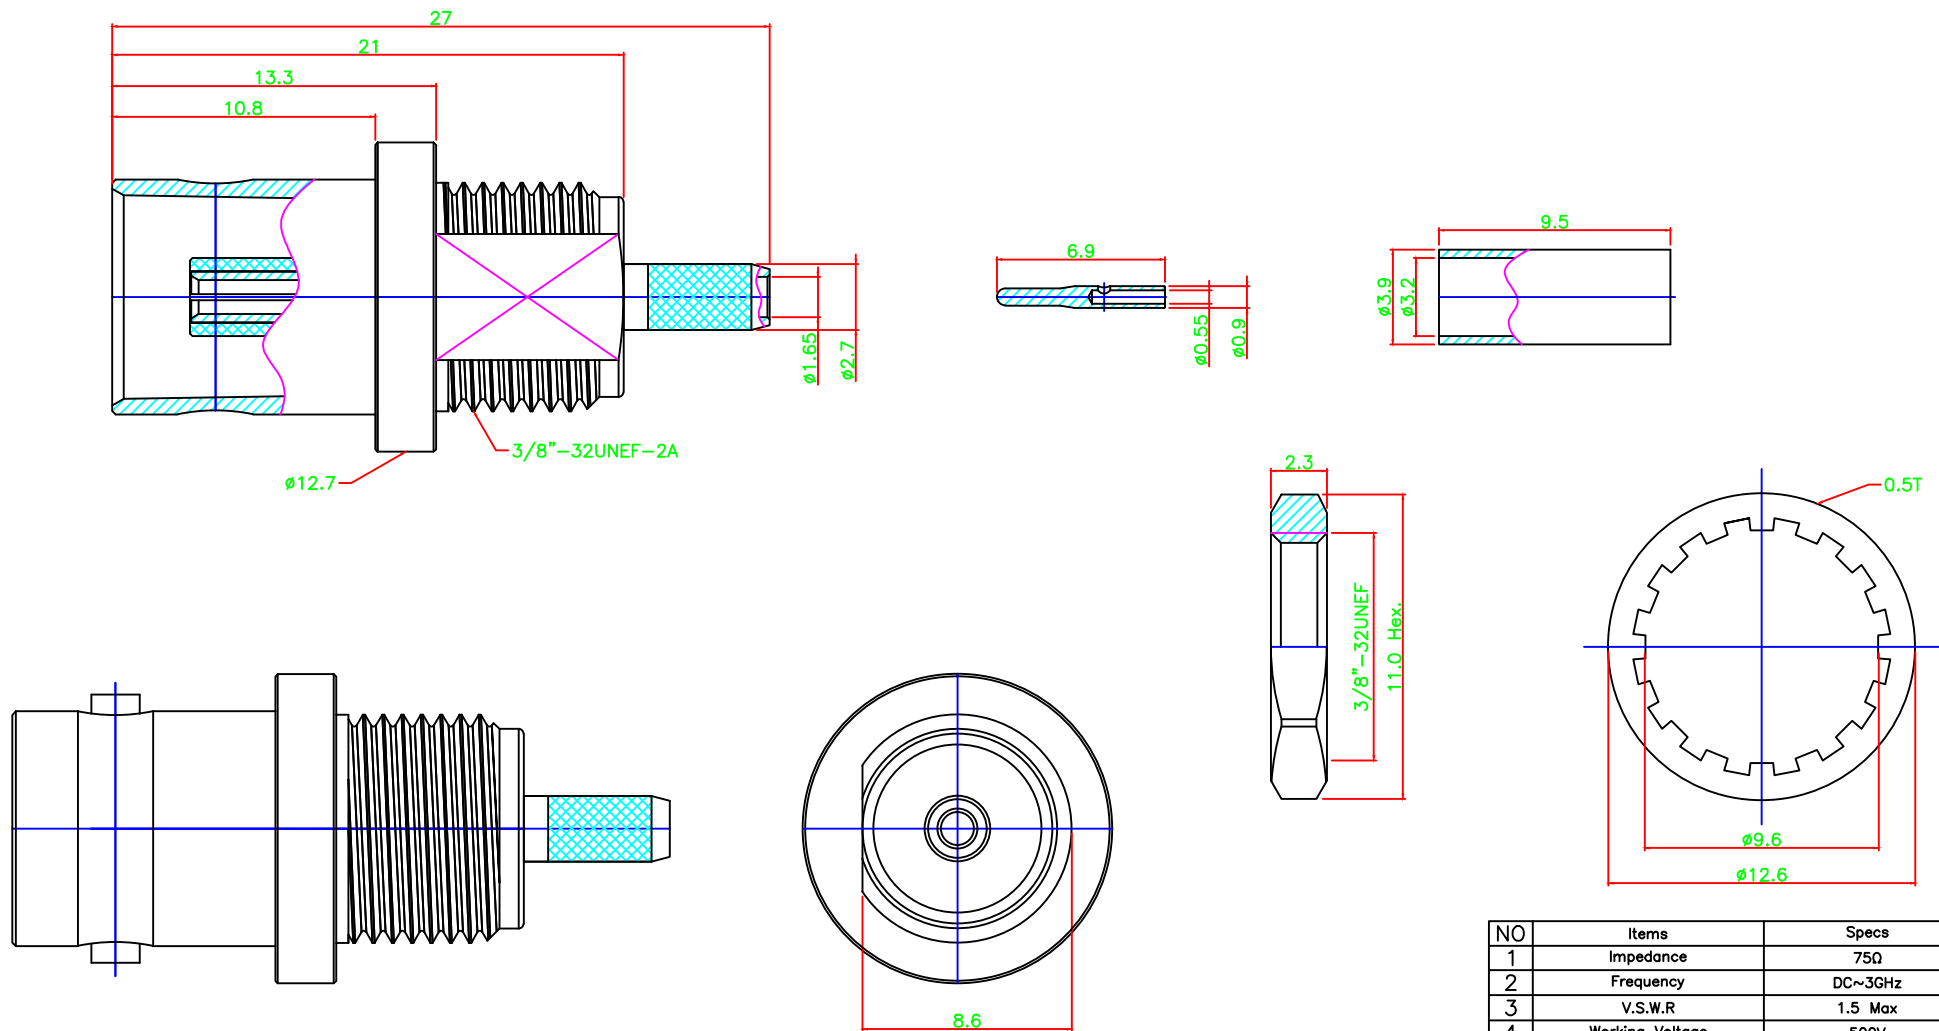

0.5–6	= ± 0.2
6–30	= ± 0.4
30–120	= ± 0.6
120–315	= ± 1.0
315–1000	= ± 1.6
1000–2000	= ± 2.4



COSMTEC RESOURCES CO., LTD

DRAFT

CHECKED

APPROVED

The Drawing Contains Information That Is Proprietary To Cosmtec Resources Co., Ltd
And Should Not Be Used Without Written Permission. www.cosmtec.com

NO	Items	Specs
1	Impedance	75Ω
2	Frequency	DC~3GHz
3	V.S.W.R	1.5 Max
4	Working Voltage	500V
5	Dielectric Withstanding Voltage	AC 1500V
6	Insulation Resistance	5000 MΩ Min
7	Contact Resistance	Center contact ≤ 1.5mΩ Outer contact ≤ 1.0mΩ
8	Temperature Range	–55°C ~ +165°C
9	Mating	Screw-On
10	Material/Finish	All RoHS Compliant

Part No.

B-071-1-179

Title: BNC JACK CRIMP BULKHEAD 75Ω
FRONT MOUNT RG-179 CABLE

DATE: JAN/29/2018

SCALE: 1:1

UNIT m/m

REV A