


NO	Items	Specs
1	Impedance	75Ω
2	Frequency	DC~12GHz
3	V.S.W.R	1.5 Max
4	Working Voltage	500V
5	Dielectric Withstanding Voltage	AC 1500V
6	Insulation Resistance	5000 MΩ Min
7	Contact Resistance	Center contact ≤ 1.5mΩ Outer contact ≤ 1.0mΩ
8	Temperture Range	-55°C ~ +165°C
9	Mating	Bayonet Lock
10	Material/Finish	All RoHS Compliant

NO	Description	Material	Finish
1	Body	Brass	Nickel
2	Insulator	Teflon	—
3	Contactator	P.H Bronze	Gold
4	Ferrule	Brass	Nickel

Dimensions Are In Millimeters
Unless Otherwise Specified
Tolerances

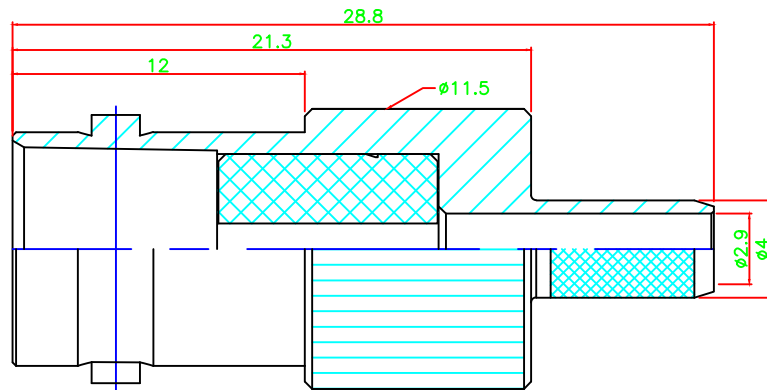

0.5-6 = ± 0.2
6-30 = ± 0.4
30-120 = ± 0.6
120-315 = ± 1.0
315-1000 = ± 1.6
1000-2000 = ± 2.4



COSMTEC RESOURCES CO., LTD

DRAFT	CHECKED	APPROVED
The Drawing Contans Information That Is Proprietary To Cosmtec Resources Co., Ltd And Should Not Be Used Without Written Permission. www.cosmtec.com		

Part No.	BS-007-1855A		
Title:	BNC JACK CRIMP 75Ω SDI FOR BELDEN 1855A		
DATE:	AUG/23/2021	SCALE:	1:1
UNIT	m/m	REV	A