



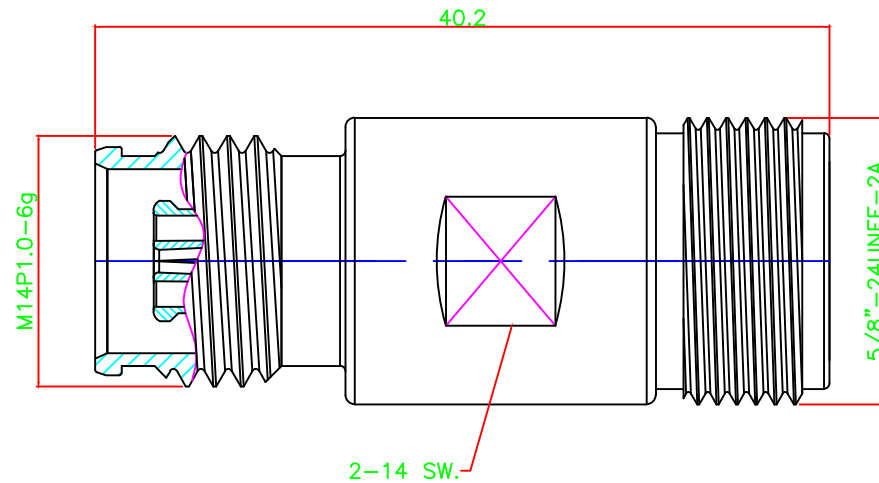

NO	Items	Specs
1	Impedance	50Ω
2	Frequency	DC~6GHz
3	V.S.W.R	1.20 Max
4	PIM	-155dBc Max.
4	Working Voltage	500V
5	Dielectric Withstanding Voltage	1500V
6	Insulation Resistance	3000 MΩ Min
7	Contact Resistance	Center contact ≤ 2mΩ
		Outer contact ≤ 1mΩ
8	Temperture Range	-55°C ~ +165°C
9	Mating	Screw-On / 500 Cycles
10	Material/Finish	All RoHS Compliant

NO	Description	Material	Finish
1	Body	Brass	CuSnZn
2	Ground	P.H Bronze	CuSnZn
3	Contact	P.H Bronze	CuSnZn
4	Insulator	Teflon	-

Dimensions Are in Millimeters Unless Otherwise Specified Tolerances		0.5-6 = ± 0.2
		6-30 = ± 0.4
		30-120 = ± 0.6
		120-315 = ± 1.0
		315-1000 = ± 1.6
		1000-2000 = ± 2.4



COSMTEC RESOURCES CO.,LTD

DRAFT	CHECKED	APPROVED
The Drawing Contans Information That Is Proprietary To Cosmtec Resources Co., Ltd And Should Not Be Used Without Written Permission.		
www.cosmtec.com		

Part No.		MMN-008		
Title:		2.2-5 JACK TO N JACK ADAPTER		
DATE:	SEP/22/2021	SCALE:	1:1	UNIT
			m/m	REV
				A