



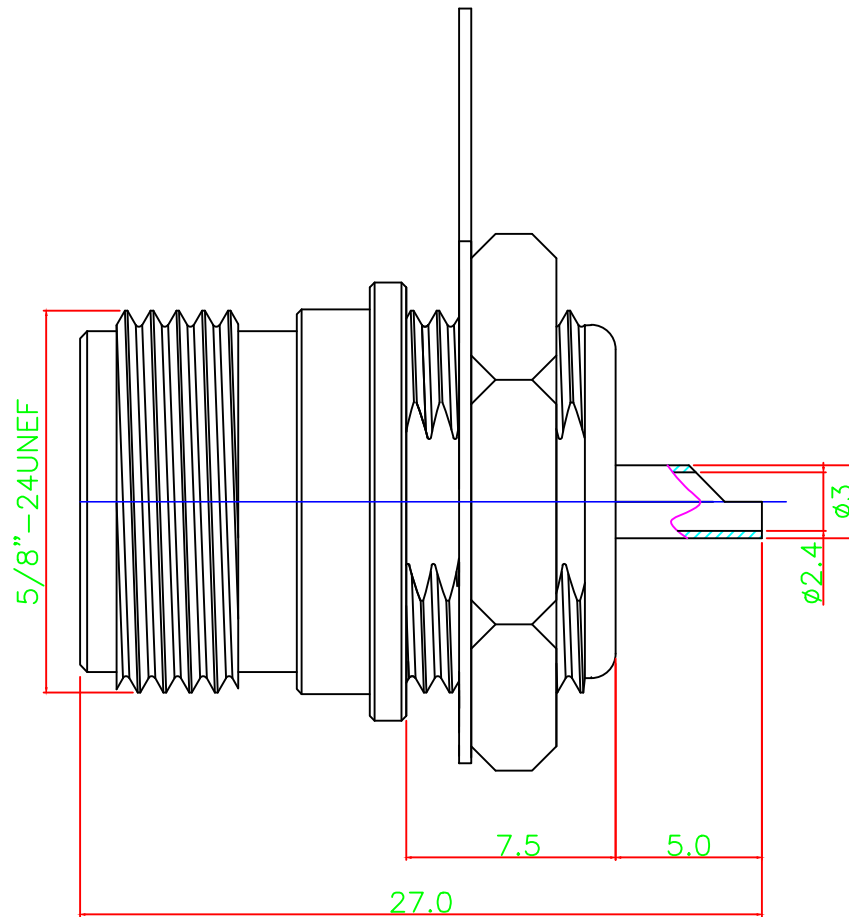

RECOMMENDED
MOUNTING HOLES

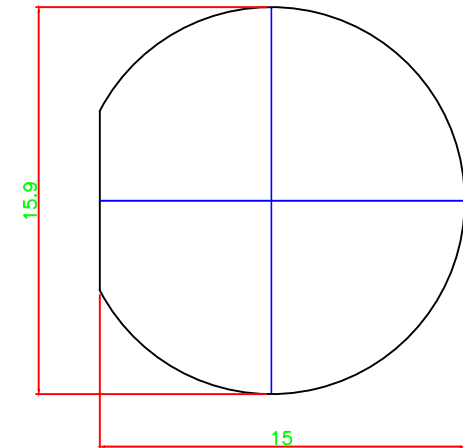

NO	Items	Specs
1	Impedance	50Ω
2	Frequency	DC~11GHz
3	Working Voltage	1000V rms
4	Dielectric Withstanding Voltage	1000V rms
5	Insulation Resistance	5G Ω Min
6	Contact Resistance	Center contact ≤ 2.0mΩ
		Outer contact ≤ 0.5mΩ
7	Temperature Range	-55°C ~ +165°C
8	Mating	Screw-On
9	Durability	500 Matings
10	Material/Finish	All RoHS Compliant

NO	Description	Material	Finish
1	Body	Brass	Nickel
2	Contact	Brass	Gold
3	Insulator	Teflon	—
4	Nut	Brass	Nickel
5	Solder Lug	Brass	Nickel

Dimensions Are in Millimeters
Unless Otherwise Specified
Tolerances



0.5-6 = ± 0.2
6-30 = ± 0.4
30-120 = ± 0.6
120-315 = ± 1.0
315-1000 = ± 1.6
1000-2000 = ± 2.4



COSMTEC RESOURCES CO., LTD

DRAFT	CHECKED	APPROVED
The Drawing Contains Information That Is Proprietary To Cosmtec Resources Co., Ltd And Should Not Be Used Without Written Permission. www.cosmtec.com		

Part No.	N-010		
Title:	N JACK SOLDER BULKHEAD		
DATE:	SEP/22/2016	SCALE:	1:1
UNIT	m/m	REV	A