


NO	Description	Material	Finish
1	Body	Brass	Nickel
2	Contact	Brass	Gold
3	Insulator	Teflon	—
4	Nut	Brass	Nickel
5	Ferrule	Brass	Nickel

Dimensions Are In Millimeters
Unless Otherwise Specified
Tolerances



0.5–6 = ± 0.2
6–30 = ± 0.4
30–120 = ± 0.6
120–315 = ± 1.0
315–1000 = ± 1.6
1000–2000 = ± 2.4

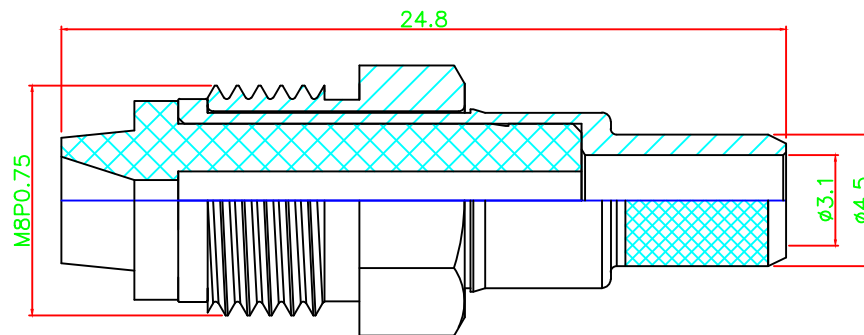

COSMTEC RESOURCES CO., LTD

DRAFT

CHECKED

APPROVED

The Drawing Contains Information That Is Proprietary To Cosmtect Resources Co., Ltd
And Should Not Be Used Without Written Permission. www.cosmtect.com

NO	Items	Specs
1	Impedance	50Ω
2	Frequency	DC~2GHz
3	V.S.W.R	1.3 Max
4	Working Voltage	100V
5	Dielectric Withstanding Voltage	1000V
6	Insulation Resistance	5000 MΩ Min
7	Contact Resistance	Center contact ≤ 10mΩ Outer contact ≤ 5mΩ
8	Temperature Range	–55°C ~ +165°C
9	Mating	Screw-On
10	Material/Finish	All RoHS Compliant

Part No.	NP-001-58-TGN		
Title:	FME JACK CRIMP FOR RG-58		
DATE:	OCT/03/2022	SCALE:	1:1
UNIT	m/m	REV	B