


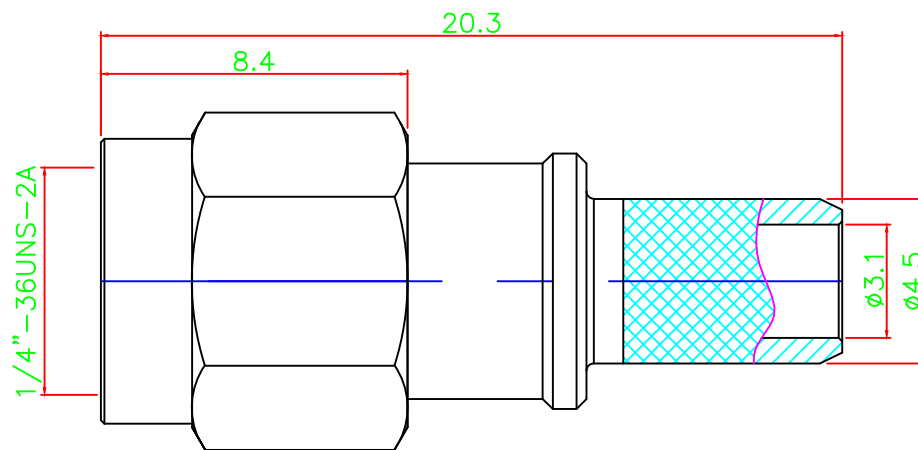


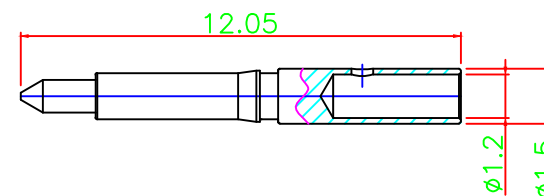

Solder or .047" / 1.2mm Hex.

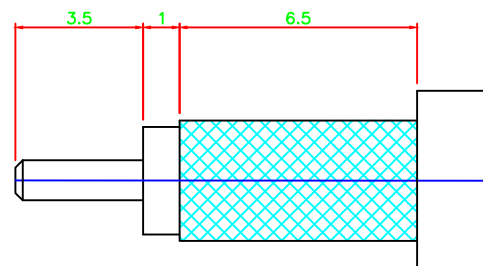

.217" / 5.5mm Hex.

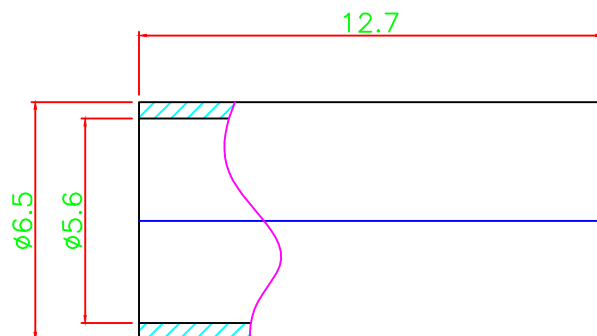


NO	Description	Material	Finish
1	Shell	Brass	Gold
2	Body	Brass	Gold
2	Insulator	Teflon	—
3	Contact	Brass	Gold
4	Sanp Ring	SUS304	—
5	Gasket	Silicone	—
6	Ferrule	Brass	Gold

Dimensions Are in Millimeters
Unless Otherwise Specified
Tolerances



0.5-6	= ± 0.2
6-30	= ± 0.4
30-120	= ± 0.6
120-315	= ± 1.0
315-1000	= ± 1.6
1000-2000	= ± 2.4



COSMTEC RESOURCES CO.,LTD

DRAFT	CHECKED	APPROVED
The Drawing Contans Information That Is Proprietary To Cosmtec Resources Co., Ltd And Should Not Be Used Without Written Permission. www.cosmtec.com		

NO	Items	Specs
1	Impedance	50Ω
2	Frequency	DC~6GHz
3	V.S.W.R	1.2 Max
4	Working Voltage	500V
5	Dielectric Withstanding Voltage	AC 1500V
6	Insulation Resistance	5000 MΩ Min
7	Contact Resistance	Center contact ≤ 3.0mΩ Outer contact ≤ 2.0mΩ
8	Temperture Range	-55°C ~ +165°C
9	Mating	Screw-On
10	Material/Finish	All RoHS Compliant

Part No. S-001-200 (A-Type)

Title: SMA PLUG RP CRIMP FOR LMR200 CABLE

DATE: MAR/25/2022	SCALE: 1:1	UNIT: m/m	REV: A
-------------------	------------	-----------	--------