


NO	Description	Material	Finish
1	Shell	Brass	Nickel
2	Body	Brass	Nickel
3	Contact	P.H. Bronze	Gold
4	SQ. Body	Brass	Nickel
5	Snap Ring	BeCu	Nickel
6	Insulator	Teflon	—
7	Cover	Brass	Nickel
8	Ferrule	Brass	Nickel

Dimensions Are In Millimeters
Unless Otherwise Specified
Tolerances



0.5-6	= ± 0.2
6-30	= ± 0.4
30-120	= ± 0.6
120-315	= ± 1.0
315-1000	= ± 1.6
1000-2000	= ± 2.4

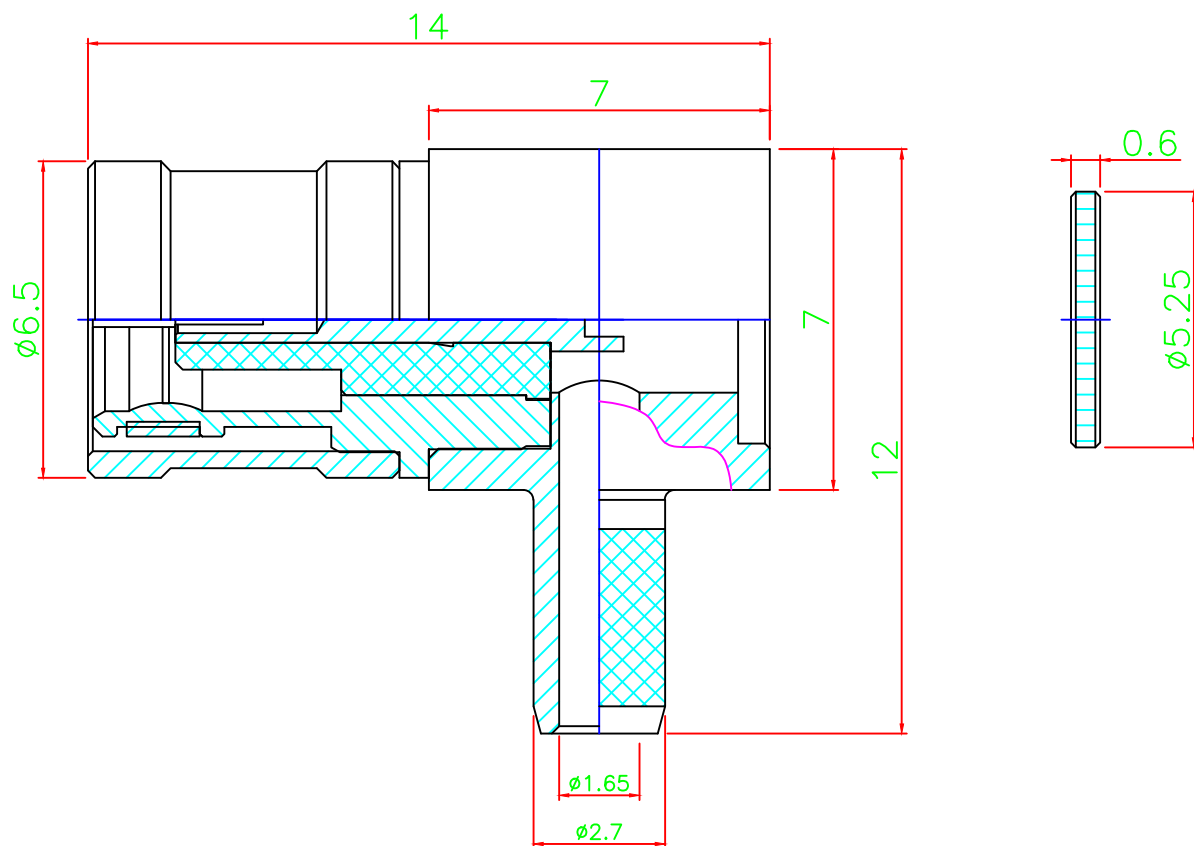

COSMTEC RESOURCES CO., LTD

DRAFT

CHECKED

APPROVED

The Drawing Contains Information That Is Proprietary To Cosmtec Resources Co., Ltd
And Should Not Be Used Without Written Permission.
Specifications are subject to change without prior notice.Cosmtec Resource Co., Ltd
All Rights Reserved, E & OE
www.cosmtec.com

NO	Items	Specs
1	Impedance	50Ω
2	Frequency	DC~4GHz
3	V.S.W.R	1.3 Max
4	Working Voltage	335V
5	Dielectric Withstanding Voltage	AC 1500V
6	Insulation Resistance	500 MΩ Min
7	Contact Resistance	Center contact ≤ 5.0mΩ Outer contact ≤ 2.5mΩ
8	Temperture Range	-55°C ~ +165°C
9	Mating	Push-Pull
10	Material/Finish	All RoHS Compliant

Part No. SB-008-174

Title:
SMB PLUG R/A
CRIMP FOR RG-174/316,LMR100

DATE:	SCALE:	UNIT	REV
JAN/08/2020	1:1	m/m	A