
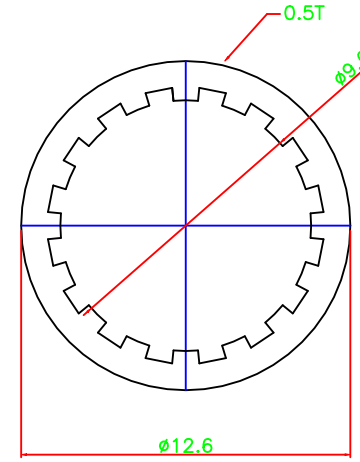


RECOMMENDED MOUNTING HOLES

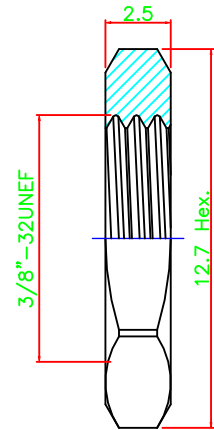

| | | |
|----|-----------------------|---|
| 1 | Impedance | 50Ω |
| 2 | Frequency | DC~6 GHz |
| 3 | V.S.W.R | 1.3 Max |
| 4 | Working Voltage | 500V |
| 5 | Insulation Resistance | 5000 MΩ Min |
| 6 | Contact Resistance | Center contact ≤ 1.5mΩ Outer contact ≤ 0.2mΩ |
| 7 | Temperature Range | -55°C ~ +165°C |
| 8 | Mating | Screw-On |
| 10 | Material/Finish | All RoHS Compliant |

| NO | Description | Material | Finish |
|----|-------------|----------|--------|
| 1 | Body | Brass | Nickel |
| 2 | Insulator | Teflon | - |
| 3 | Contactors | Brass | Gold |
| 4 | Nut | Brass | Nickel |
| 5 | Washer | Brass | Nickel |
| 6 | Cover | Brass | Nickel |
| 7 | Washer | Brass | Nickel |

Dimensions Are In Millimeters Unless Otherwise Specified Tolerances

| | |
|-----------|---------|
| 0.5-6 | = ± 0.2 |
| 6-30 | = ± 0.4 |
| 30-120 | = ± 0.6 |
| 120-315 | = ± 1.0 |
| 315-1000 | = ± 1.6 |
| 1000-2000 | = ± 2.4 |

ROHS COMPLIANT

COSMTEC COSMTEC RESOURCES CO.,LTD

DRAFT CHECKED APPROVED

The Drawing Contains Information That Is Proprietary To Cosmtec Resources Co., Ltd And Should Not Be Used Without Written Permission. www.cosmtec.com

| | |
|----------|--|
| Part No. | T-016-TGN |
| Title: | TNC JACK SOLDER BULKHEAD FRONT MOUNT T.G.N |
| DATE: | DEC/11/2020 |
| SCALE: | 1:1 |
| UNIT | m/m |
| REV | A |