

**2.92(K) Female to 1.85(V) Male Adapter
RF Connector Technical Data Sheet
K-008-ST**

Configuration

- 2.92(K) Female Connectr 1
- 1.85(V) Male Connectr 2
- 50 Ohms

Features

- Max VSWR of 1.2 : 1 up to 40 GHz
- 2.92(K) Interface compliant with IEC-61169-35
- 1.85(V) Interface compliant with IEC-61169-32

Applications

- General Purpose Test

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		40	GHz
VSWR	1.15		1.2 : 1	
Operating Voltagr(AC)			250	Vrms
Inner Conductor DC Resistance			3	mOhms
Outer Conductor DC Resistance			2	mOhms
Insertion Resistance	5,000			MOhms

Mechanical Specifications

Size

Length	[mm]	26.94
Width	[mm]	9.0
Height	[mm]	9.0
Weight	[g]	7.2



2.92(K) Female to 1.85(V) Male Adapter
RF Connector Technical Data Sheet
K-008-ST

Description	Connector 1	Connector2
Type	2.92(K) Female	1.85(V) Male
Polarity	Standard	Standard
Interface Specification	IEC-61169-35	IEC-61169-32
Mating Cycles	500	500
Hex Size	-	-
Mating Torque	-	-
Coupling Proof Torque, Min	-	-

Material Specifications

Description	Connector 1		Connector2	
	Material	Plating	Material	Plating
Type	2.92(K) Female	-	1.85(V) Male	-
Contact	Beryllium Copper	Gold	Beryllium Copper	Gold
Insulation	PEI	-	PEI	-
Outer Conductor	-	-	-	-
Body	Stainless Steel	Passivated	Stainless Steel	Passivated
Gasket	-	-	-	-
Coupling Nut	-	-	-	-

Environmental Specifications

Temperature

Operating Range -60 to +165 deg C


Compliance Certifications

- RoHS Compliant Yes

Plotted and Other Data

Notes: Do Turn Male (Plug) Connector's Nut (Shell) Only To Tighten

2.92(K) Female to 1.85(V) Male Adapter
RF Connector Technical Data Sheet
K-008-ST

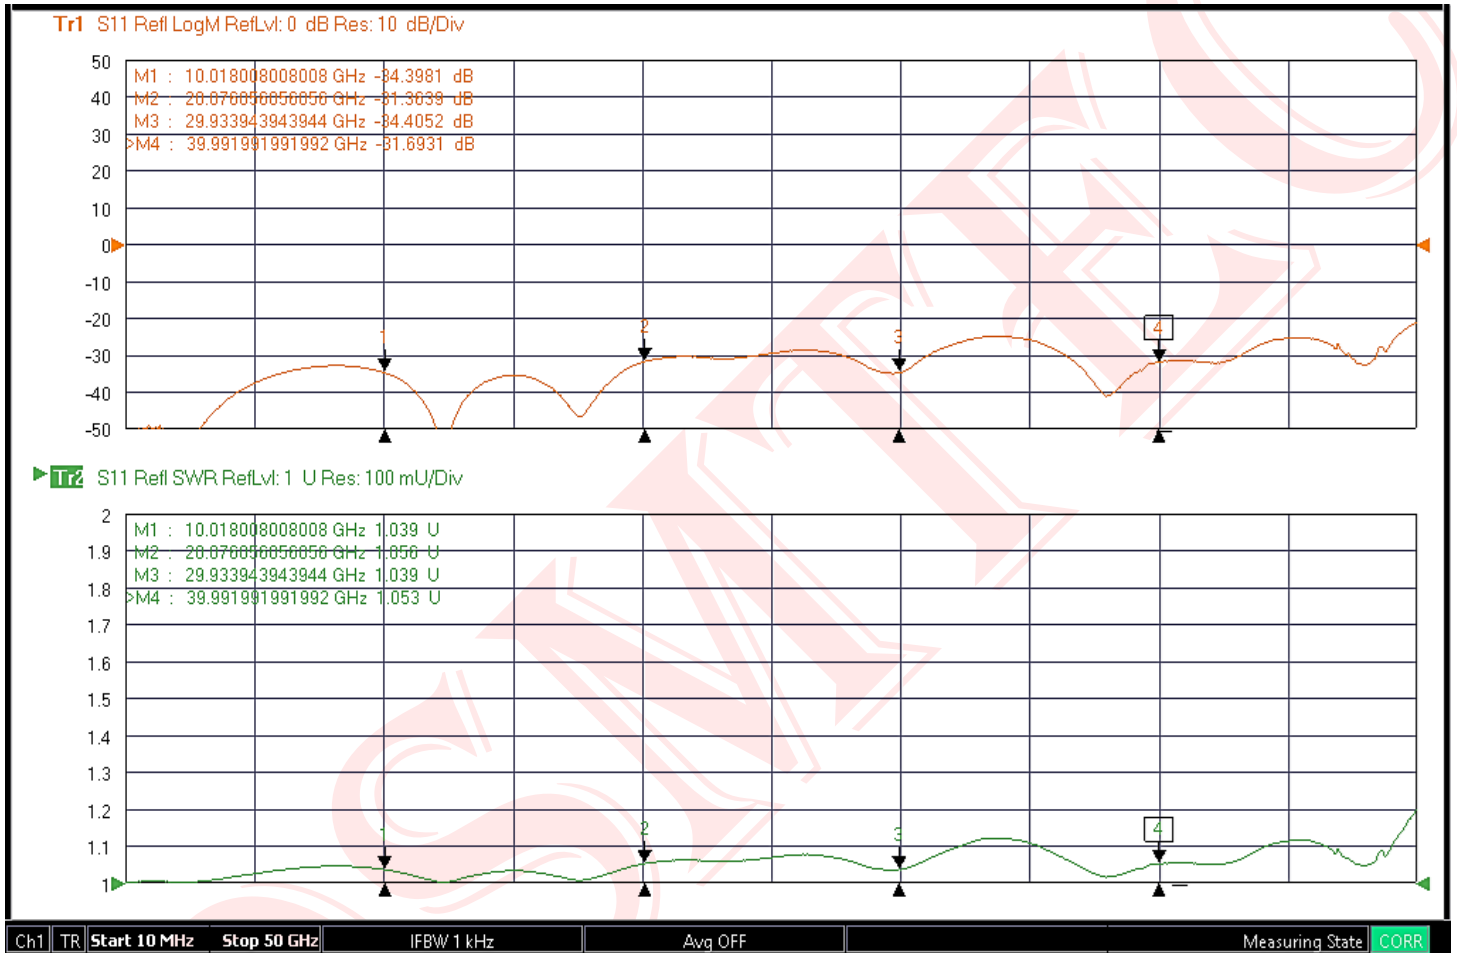

**2.92(K) Female to 1.85(V) Male Adapter
RF Connector Technical Data Sheet
K-008-ST**

