

SMA Male to SMA Female Right Angle Adapter
RF Adapters Technical Data Sheet
S-032-1

Configuration

- SMA Male Connectr 1
- SMA Female Connectr 2
- 50 Ohms

Features

- Max VSWR of 1.25 : 1 up to 18 GHz
- SMA Interface compliant with MIL-STD-348A /IEC-60169-15

Applications

- General Purpose Test

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
VSWR		1.15 : 1	1.25 : 1	
Operating Voltagr(AC)			500	Vrms
Inner Conductor DC Resistance			3	mOhms
Outer Conductor DC Resistance			2	mOhms
Insertion Resistance	5,000			mOhms

Mechanical Specifications

Size

Length	[mm]	17.1
Width	[mm]	9.0
Weight	[g]	4.5



SMA Male to SMA Female Right Angle Adapter
RF Adapters Technical Data Sheet
S-031-1

Description	Connector 1	Connector2
Type	SMA Male	SMA Female
Polarity	Standard	Standard
Interface Specification	MIL-STD-348A	MIL-STD-348A
	MIL-C-39012	MIL-C-39012
Mating Cycles	500	500
Hex Size	8.0 mm	-
Mating Torque	3 to 5 in-lbs	-
Coupling Proof Torque, Min	5 in-lbS	-

Material Specifications

Description	Connector 1		Connector2	
	Material	Plating	Material	Plating
Type	SMA male	-	SMA Female	-
Contact	Beryllium Copper	Gold	Beryllium Copper	Gold
Insulation	PTFE	-	PTFE	-
Outer Conductor	-	-	-	-
Body	Stainless Steel	Passivated	Stainless Steel	passivated
Gasket	Silicone	-	-	-
Coupling Nut	Stainless Steel	Passivate	-	-

Environmental Specifications

Temperature

Operating Range -50 to +125 deg C


Compliance Certifications

- RoHS Compliant Yes

Plotted and Other Data

Notes :

SMA Male to SMA Female Right Angle Adapter
RF Adapters Technical Data Sheet
S-032-1

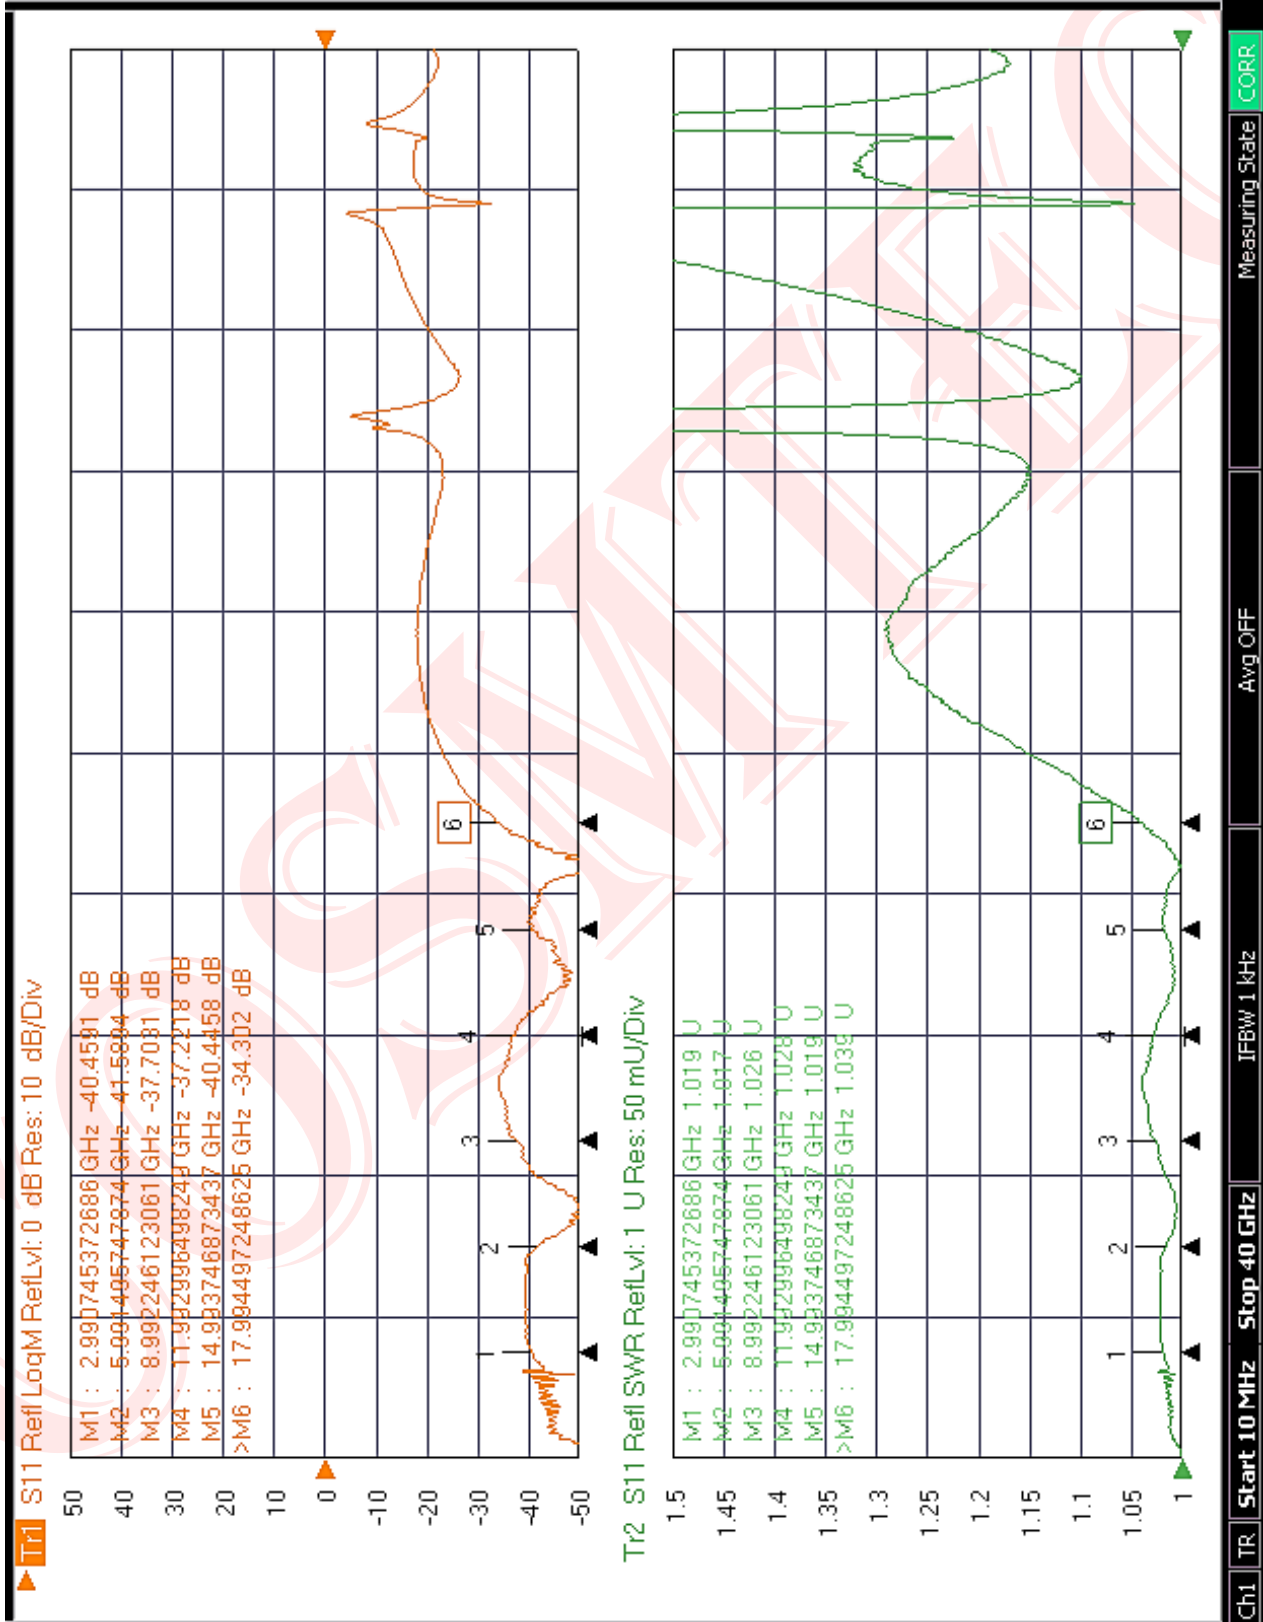

SMA Male to SMA Female Right Angle Adapter
RF Adapters Technical Data Sheet
S-032-1

